

CORE C-ERV389

IMPROVING LIFE AT ITS CORE

DESCRIPTION

High performing Counterflow Enthalpy Exchanger with maximum efficiency due to our unique and patented channel design. Its special membrane allows the transfer of humidity but blocks odours and contaminants. Therefore, humidity levels can be controlled and the living comfort improved. The C-ERV389 is characterised by the highest quality, a long life and low maintenance and can be custom made to fit your specific needs.


PRIMARY APPLICATION

Residential

PRODUCT BENEFITS


- Virtually no condensation forms inside the CORE, reducing the need for a condensate drain, lowering the instances where freezing occurs and thus providing better overall efficiency levels when compared to HRVs
- Manufactured with a hygienic, mold and bacteria resistant, water washable polymer membrane
- Available heights: 50 – 500 mm
- Leakage: < 1 % of nominal flow rate, 100 % leakage tested
- Material resistance: -20 °C – +50 °C (very low freezing point)

EFFICIENCY

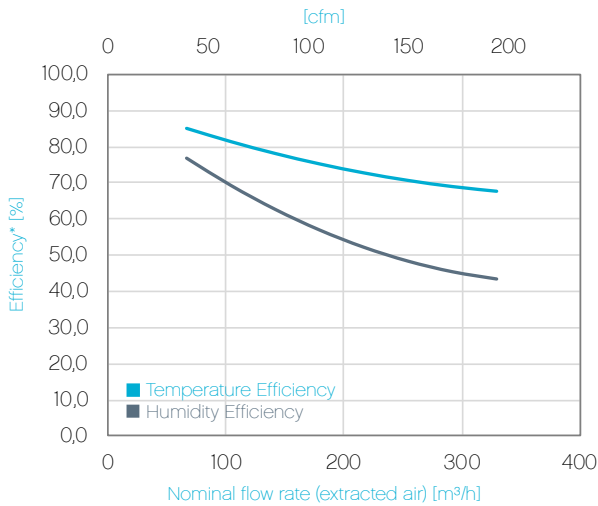

*Based on a CORE height of 500 mm, test conditions following DIN EN 3081997-06 (intake air: temp. 5 °C, humidity 70 %, extracted air: 25 °C, humidity 50 %)

PRESSURE DROP

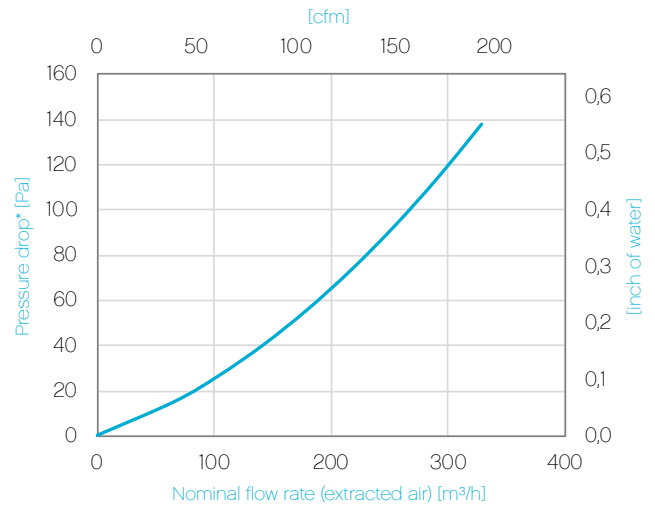

European Office:
August-Horch-Strasse 7
08141 Reinsdorf
Germany
+49 375 303 505 88
reinsdorf@core.life


North American Office:
1455 East Georgia Street,
Vancouver, BC, V5L 2A9
Canada
+1 604 488 1132
vancouver@core.life

www.core.life




CORE C-ERV389

TEMPERATURE AND HUMIDITY EFFICIENCY (HEIGHTS 100 – 400 mm)

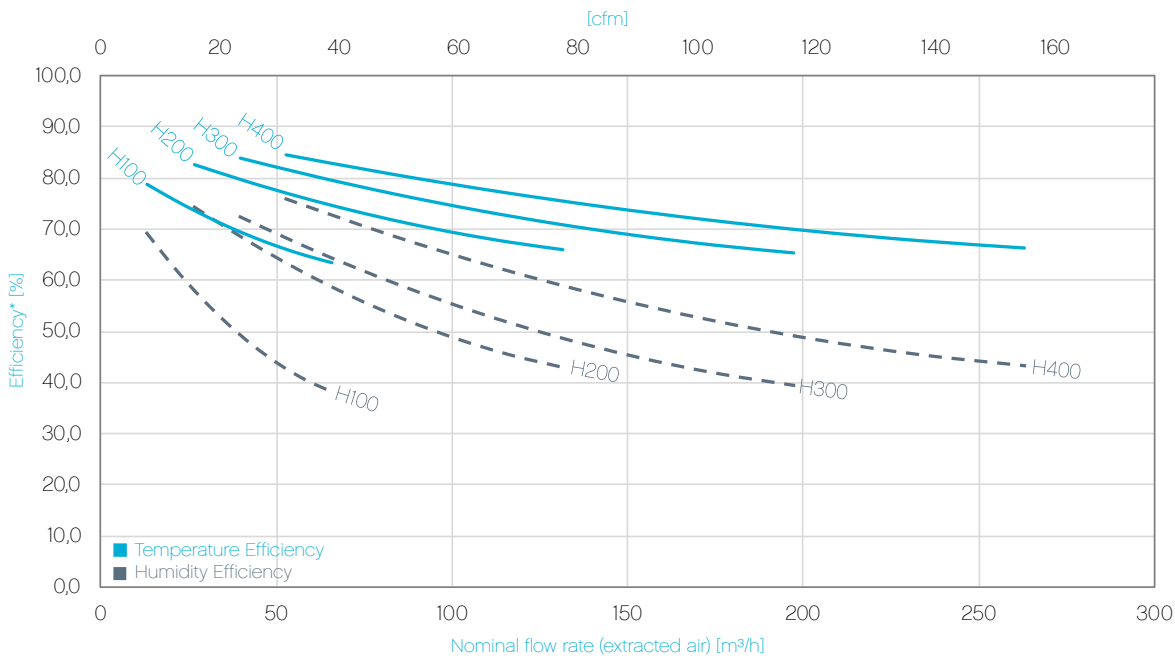

*Test conditions following DIN EN 308:1997-06 (intake air: temp. 5 °C, humidity 70 %; extracted air: 25 °C, humidity 50 %)

DIMENSIONS [mm]

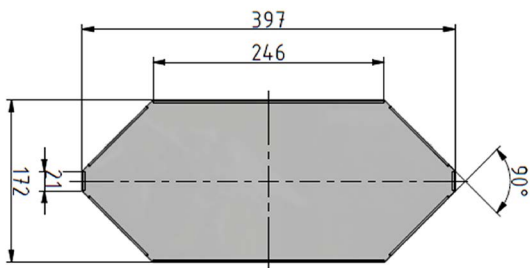

Visit us at www.core.life to learn more about us and our products. We are looking forward to your visit!

